


# MLED

Our best-selling fluorescent underbin fixture is available in energy-efficient LED—and it's the perfect solution for transitioning to a more environmentally-friendly light. MLED features brilliant LED light with integrated AC power. With three mounting options available and no power brick to manage, it attaches effortlessly beneath nearly all overhead office cabinets. MLED can also be ordered with an optional occupancy sensor for maximum energy-efficiency and long-term cost savings. **Proudly designed and manufactured in Grand Haven, Michigan.**

## Finishes

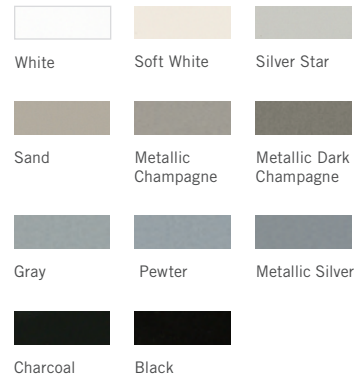

# MLED

## Features


- Integrated AC power
- Occupancy sensor available

## Specifications

<b>Lengths:</b>	24", 36", 45"
<b>Power consumption:</b>	see chart below
<b>Color temperature:</b>	3500K
<b>Luminosity:</b>	see chart below
<b>Color rendering index:</b>	80+ CRI
<b>Rated lifespan:</b>	> 36,000 hours
<b>Number of LEDs:</b>	see chart below
<b>Cord:</b>	9' black

	# of LEDs	Lumens	Wattage
24"	22	518	9.2
36"	33	916	13.7
45"	44	1293	18.7

## Dimensions

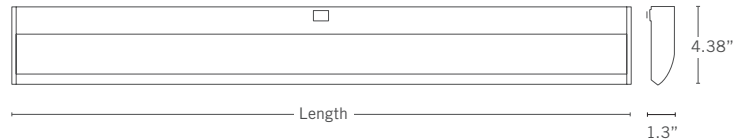

## Sustainability Notes

- Made with fully-recyclable powder coated steel and plastic
- Energy-saving occupancy sensor available as an option
- High efficiency frosted lens
- Lower power consumption
- Mercury-free
- Potential LEED points: **Interior Lighting** (possible 2 points), **Interior Lighting Controls** (possible 1 point). For more LEED information please visit <https://new.usgbc.org/leed-v41>

## Certifications



ETL listed: compliant to UL 153/8750 & CSA C22.2 No. 250.4; FCC Part 15 Class B; TAA; BAA (varies per options selected); CEC Title 20

## Warranty

The MLED fixture is warranted for a period of 5 years.

	Actual Length	Suggested Shelf Size
24"	23.3"	30"-36"
36"	35.1"	42"-48"
45"	44.3"	> 48"

# MLED

## Photometric Data

---

Footcandle outputs measured at 18" from the work surface.

24" Fixture	18"	12"	6"	CL	6"	12"	18"	36" Fixture	18"	12"	6"	CL	6"	12"	18"
12"	26	44	60	67	60	44	26	12"	40	60	74	81	74	60	40
6"	35	66	97	110	97	66	35	6"	58	91	116	126	116	91	58
3"	35	69	104	<b>118</b>	104	69	35	3"	61	98	124	<b>134</b>	124	98	61
CL	31	62	94	107	94	62	31	CL	55	88	112	121	112	88	55
6"	14	26	37	42	37	26	14	6"	24	36	44	48	44	36	24

45" Fixture	18"	12"	6"	CL	6"	12"	18"
12"	61	80	90	95	90	80	61
6"	93	123	139	145	139	123	93
3"	100	132	149	<b>154</b>	149	132	100
CL	91	121	136	141	136	121	91
6"	38	49	55	57	55	49	38